

半圆头方颈螺栓

ANSI/ASME

B18.5

1978

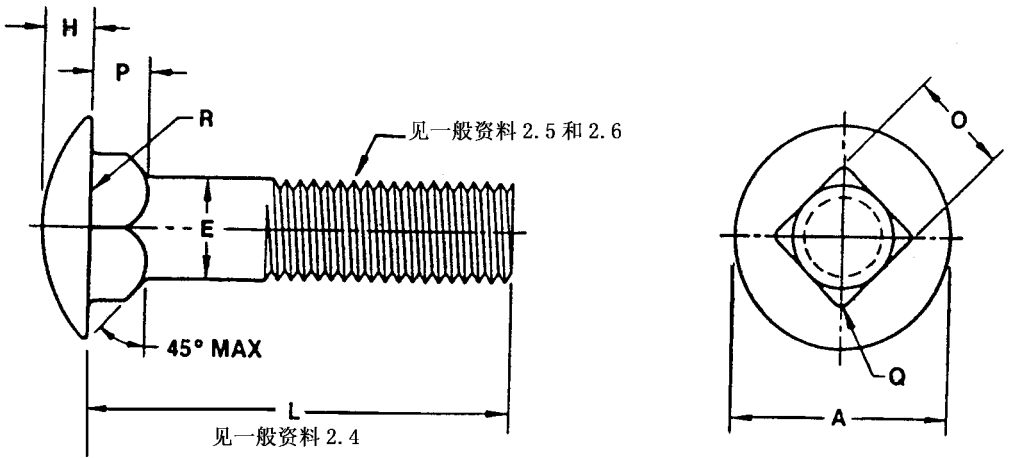


表 2 半圆头方颈螺栓的尺寸

公称规格 或 基本螺栓直径	E		A		H		O		P		Q	R
	杆部直径		头部直径		头部高度		方颈宽度		方颈深度		方颈的 圆角半径	圆角 半径
	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Max
No. 10 0.1900	0.199	0.182	0.469	0.438	0.114	0.094	0.199	0.185	0.125	0.094	0.031	0.031
1/4 0.2500	0.260	0.237	0.594	0.563	0.145	0.125	0.260	0.245	0.156	0.125	0.031	0.031
5/16 0.3125	0.324	0.298	0.719	0.688	0.176	0.156	0.324	0.307	0.187	0.156	0.031	0.031
3/8 0.3750	0.388	0.360	0.844	0.782	0.208	0.188	0.388	0.268	0.219	0.188	0.047	0.031
7/16 0.4375	0.452	0.421	0.969	0.907	0.239	0.219	0.452	0.431	0.250	0.219	0.047	0.031
1/2 0.5000	0.515	0.483	1.094	1.032	0.270	0.250	0.515	0.492	0.281	0.250	0.047	0.031
5/8 0.6250	0.642	0.605	1.344	1.219	0.344	0.313	0.642	0.616	0.344	0.313	0.078	0.062
3/4 0.7500	0.768	0.729	1.594	1.469	0.406	0.375	0.768	0.741	0.406	0.375	0.078	0.062